


Reset Operation Guide

RICOH

When gas is shut off and 【ガス止】indication is displayed in the LCD.

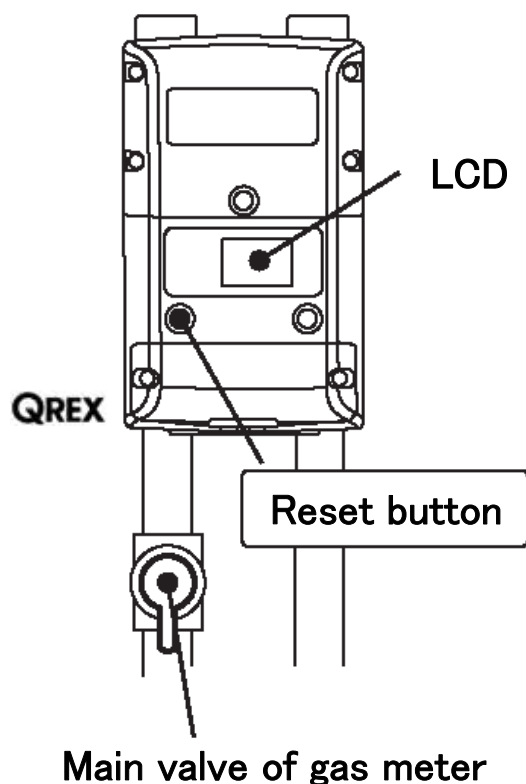

To reset gas meter

- ① Shut off all gas appliances.
Make sure to shut off gas valve of boiler located outdoors.
Do not close main valve of gas meter.
- ② Press reset button.
(Surrounding area of reset button blinks in red.)
‘A, B and C’ indication blinks in the LCD instead of 【ガス止】indication.
- ③ Wait for 30 seconds.*
The microprocessor confirms the safety during countdown.
- ④ Once 「ABC」 indication in the LCD is off, suspension of gas supply is cancelled.

*It may take 90 seconds, depending on the settings.



CAUTION

When 【ガス止】 is displayed during 30 seconds* countdown, reconfirm whether all gas appliances, including gas appliances using pilot flame, are turned off. Then follow the steps above, again.

● Please contact your gas distributor, if the suspension of gas supply is not cancelled by the above resetting procedure.